


Fieldmarshal

SHRIDEV 

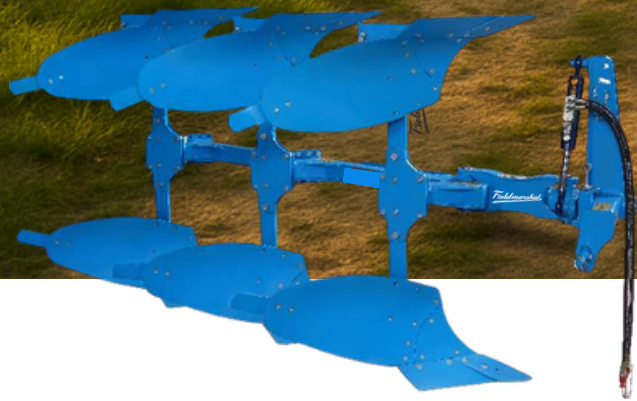

Strong Implements for Stronger Yields.

PLOUGH LEAFLET

HYDRAULIC REVERSIBLE PLOUGH

specifications



Model	SD SC-111	SD SC-175
Size	2 Furrow	3 Furrow
Frame	90x90 mm Square Pipe	90x90 mm Square Pipe
Main Shaft	65 mm	65 mm
Tyne	80x25	80x25
Working Width	20 to 28 Inch	30 to 42 Inch
Height	58 Inch	58 Inch
Blade	10 mm	10 mm
Mould Board	8 mm	8 mm
Adjustment	Hydraulic	Hydraulic
Weight (approx)	400 Kg.	540 Kg.
Power Required	50 HP & Above	65 HP & Above

Model	SD SC-735	SD SC-775
Size	2 Furrow	3 Furrow
Frame	100x100 mm Square Pipe	100x100 mm Square Pipe
Main Shaft	100 mm	100 mm
Tyne	80x25	80x25
Working Width	24 Inch	28 Inch
Height	58 Inch	58 Inch
Blade	10 mm	10 mm
Mould Board	8 mm	8 mm
Adjustment	Hydraulic	Hydraulic
Weight (approx)	415 Kg.	555 Kg.
Power Required	45 HP & Above	60 HP & Above



Model	SD SC-545	SD SC-55	SD SC-55
Size	2 Furrow	2 Furrow	3 Furrow
Frame	100x100 mm Square Pipe	100x100 mm Square Pipe	100x100 mm Square Pipe
Main Shaft	100 mm	100 mm	100 mm
Tyne	25 mm	25 mm	25 mm
Working Width	20 Inch	24 Inch	36 Inch
Height	55 Inch	55 Inch	55 Inch
Blade	12 mm	12 mm	12 mm
Mould Board	8 mm	10 mm	10 mm
Adjustment	Hydraulic	Hydraulic	Hydraulic
Weight (approx)	465 Kg.	500 Kg.	680 Kg.
Power Required	45 HP & Above	50 HP & Above	75 HP & Above

SINGLE CYLINDER 3 BOTTOM

specifications



Model	SD SC-303	SD SC-345	SD SC-350	SD SC-355
Size	3 Furrow	3 Furrow	3 Furrow	4 Furrow
Frame	100x25 mm Box 100 mm Round	100x25 mm Box 100 mm Round	100x25 mm Box 100 mm Round	100x25 mm Box 100 mm Round
Tyne	25 mm (3-Type)	32 mm (3-Type)	35 mm (3-Type)	32 mm (3-Type)
Working Width	30 Inch	30 Inch	30 Inch	40 Inch
Height	45 Inch	45 Inch	45 Inch	45 Inch
Blade	12 mm	12 mm	12 mm	12 mm
Mould Board	6 mm (14" Tyne)	6 mm (14" Tyne)	8 mm (16" Tyne)	8 mm (16" Tyne)
Shovel (Point)	32mm x 25 mm	32mm x 25 mm	32mm x 25 mm	32mm x 25 mm
Bearing	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)
Adjustment	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Distance Between Tyne	10 Inch	10 Inch	10 Inch	10 Inch
Depth of Cut	10-12 Inch	10-12 Inch	10-12 Inch	10-12 Inch
Weight (Approx)	425 Kg.	465 Kg.	500 Kg.	620 Kg.
Power Required (HP)	40-45 HP	45-55 HP	50-60 HP	50-60 HP

SINGLE CYLINDER 2 BOTTOM

Model	SD SC-35	SD SC-42	SD SC-47	SD SC-50	SD SC-60
Size	2 Furrow	2 Furrow	2 Furrow	2 Furrow	2 Furrow
Frame	100x25 mm Box 100 mm	100x25 mm Box 100 mm	100x25 mm Box 100 mm	100x25 mm Box 100 mm	100x32 mm Box 100 mm
Tyne	32 mm (3-Type)	25 mm (C-Type)	28 mm (C-Type)	32 mm (C-Type)	32 mm (C-Type)
Working Width	19 Inch	19 Inch	20 Inch	22 Inch	24 Inch
Height	45 Inch	48 Inch	51 Inch	51 Inch	51 Inch
Blade	12 mm	12 mm	12 mm	12 mm	12 mm
Mould Board	8 mm (13" Tyne)	8 mm (14" Tyne)	8 mm (14" Tyne)	10 mm (16" Tyne)	10 mm (16" Tyne)
Shovel (Point)	32mm x 25 mm	38mm x 25 mm	38mm x 25 mm	38mm x 25 mm	38mm x 25 mm
Bearing	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)
Adjustment	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Distance Between Tyne	9.5 Inch	9.5 Inch	10 Inch	11 Inch	12 Inch
Depth of Cut	10-12 Inch	12-14 Inch	12-14 Inch	12-14 Inch	12-14 Inch
Weight (Approx)	350 Kg.	435 Kg.	450 Kg.	500 Kg.	520 Kg.
Power Required (HP)	35-40 HP	40-45 HP	45-50 HP	50-55 HP	55-60 HP



MECHANICAL REVERSIBLE 2 & 3 MB PLOUGH



Model	SD ME-215	SD ME-35	SD ME-40	SD ME-45	SD ME-210
Size	2 Furrow	2 Furrow	2 Furrow	2 Furrow	3 Furrow
Frame	100x16 mm Box	100x25 mm Box	100x25 mm Box	100x25 mm Box	100x25 mm Box
Tyne	18 mm (C-Type)	32 mm (C-Type)	25 mm (C-Type)	28 mm (C-Type)	25 mm (C-Type)
Working Width	16 Inch	19 Inch	19 Inch	20 Inch	30 Inch
Height	31 Inch	45 Inch	48 Inch	51 Inch	48 Inch
Blade	8 mm	8 mm	12 mm	12 mm	12 mm
Mould Board	6 mm	8 mm (13")	7 mm (14")	8 mm (14" Tyne)	6 mm (14" Tyne)
Shovel (Point)	25 mm x 25 mm	32 mm x 25 mm	32 mm x 25 mm	32 mm x 25 mm	32 mm x 25 mm
Bearing	32211 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)	33019 (2 Nos.)
Adjustment	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Distance Between Tyne	8 Inch	9.5 Inch	9.5 Inch	10 Inch	10 Inch
Depth of Cut	8 Inch	10-12 Inch	12-14 Inch	12-14 Inch	10-12 Inch
Weight (Approx)	150 Kg.	350 Kg.	435 Kg.	450 Kg.	425 Kg.
Power Required (HP)	15-20 HP	30-35 HP	35-40 HP	40-45 HP	40-45 HP

specifications

HYDRAULIC REVERSIBLE PLOUGH



Model	SD H 70	SD H 40	SD H 35
Overall Length	2815 mm	2500 mm	1864 mm
Overall Width	1275 mm	1220 mm	1095 mm
Overall Height	1315 mm	1285 mm	1295 mm
Frame	200 x100 mm	200 x100 mm	200 x100 mm
Main Shaft	100 Round Bar	100 Round Bar	100 Round Bar
Tyne	70mm Round	70mm Round	70mm Round
Number of Disc	4 Disc	3 Disc	2 Disc
Disc Dia & Thickness	660x6 mm	660x6 mm	660x6 mm
Working width	1118 mm	762 mm	508 mm
Total Weight	650 Kg.	525 Kg.	380 Kg.
Power of Required HP	65 to 90 HP	50 to 75 HP	35 to 45 HP

AUTOMATIC REVERSIBLE 2 & 3 DISC PLOUGH

Model	SD M40	SD M 35
Overall Length	2250 mm	1890 mm
Overall Width	1400 mm	1180 mm
Overall Height	1020 mm	1250 mm
Frame	114 mm Round pipe	114 mm Round pipe
Main Shaft	70mm Round Bar	70mm Round Bar
Tyne	114mm Round Bar	114mm Round Bar
Number of Disc	4 Disc	3 Disc
Disc Dia & Thickness	660x6 mm Thickness	660x6 mm Thickness
Working width	1118 mm	762 mm
Total Weight	650 Kg.	525 Kg.
Power of Required HP	65 to 90 HP	50 to 75 HP



Import & Marketed By :

ARVIND INDUSTRIES

Near PTC Hostel, Bhavnagar Road, Opp. ISPL, Rajkot-360003 (India)

Whatsapp Business No.: +91 90235 50564 CIN : U29195GJ1980PTC003918

E-mail : contactus@fieldmarshal.com Web : www.fieldmarshal.com

Follow us at : Fieldmarshal-PMDL Mob. No. : +91 91068 82861

As continuous improvements are contemplated the illustration and description are not binding
(This artistic / literary work is in the sole ownership of P. M. Diesels Pvt. Ltd. Infringement / Un authorised copying of this artistic work is an offence under the provisions of Copy Right Act. 1957)